




VGRCB-13CPF / VGFCB-13CPF

The VGRCB-13CPF provides 13 contacts for coax, power or a combination of both contact styles. Coax contacts are provided for signals up to 500Mhz and power signals up to 30 Amps / 250 VAC. Proper alignment is ensured by two precision alignment pins per block. Two shoulder mounting screws per VGR block allow the block to float in the receiver. Contacts, blocks and cables sold separately.

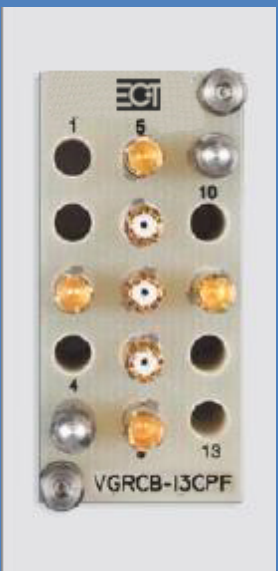

Contact Pair Specifications

Voltage Rating (dielectric breakdown)	250VDC
Current	1.5 Amps
Contact Resistance	6mΩ
Capacitance	5pf
Inductance	3nH
Bandwidth (-3db roll off)	500Mhz
Durability	25,000 Cycles
Center Conductor	Replaceable Spring Probe
Coax Connection Type	Crimp

Ordering Information:

Receiver Module:

36" Receiver Coax Cable Assy. VGRCB-13CPF Ref No (580)
 Receiver Power Contact CR-CA50RG174-36
 CR-610116102

Fixture Module:

36" Fixture Coax Cable Assy. VGFCB-13CPF Ref No (579)
 10 AWG Fixture Power Contact CR-CA50RG174-36
 12 AWG Fixture Power Contact CF-610115102
 CF-610115103

Accessories

Receiver Contact Extraction Tool VGRXT Fixture Contact Extraction Tool VGFXT

For more information about VG Mass Interconnect products:
 Contact your Local Sales Representative at www.ect-cpg.com/principal-offices
 Visit ECT Online at www.ect-cpg.com/vg-mass-interconnect-products



A Cohu Company