




# VGRCB-24CPF / VGFCB-24CPF

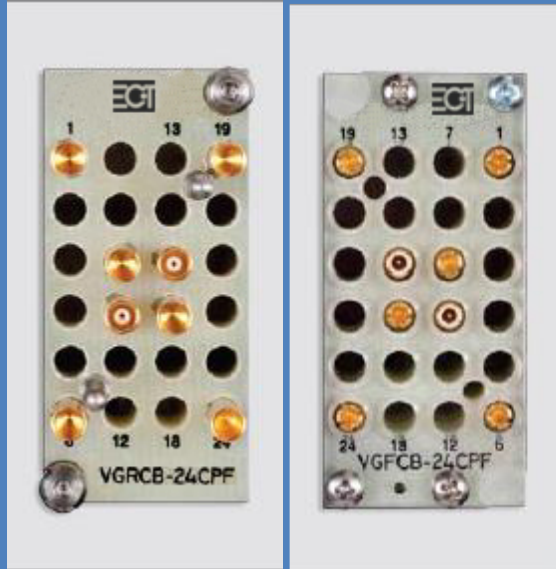

The VGRCB-24CPF provides 24 contacts for mini coax, mini-power or a combination of both contact styles. Coax contacts are provided for signals up to 1Ghz and power signals up to 50 Amps / 250 VAC. Two precision alignment pins per block ensure proper alignment. Two shoulder mounting screws per VGR block allow the block to float in the receiver. Contacts, blocks and cables sold separately.

## Coax Contact Pair Specifications

Voltage	250VAC
Current	.5 Amps
Contact Resistance	5mΩ
Impedance	50Ω
Capacitance	21pf
Inductance	3nH
Bandwidth	1Ghz
Durability	25,000 Cycles
Coax Connection Type	Crimp

## Power Contact Pair Specifications

Power Contact (8AWG std)	50 Amps
--------------------------	---------

## Ordering Information:

Receiver Module:	VGRCB-24CPF Ref No (908)	Fixture Module:	VGFCB-24CPF Ref No (909)
36" Receiver Coax Cable Assy.	CR-MCA50RG174-36	36" Fixture Coax Cable Assy.	CF-MCA50RG174-36
Receiver Mini Coax Contact	CR-610104114	Fixture Mini Coax Contact	CF-610103115
Receiver Mini Power Contact	CR-610116112	Fixture Mini Power Contact	CF-0883011-02

## Accessories

Receiver / Fixture Contact Extraction Tool	VGMXT
--	-------

For more information about VG Mass Interconnect products:  
Contact your Local Sales Representative at [www.ect-cpg.com/principal-offices](http://www.ect-cpg.com/principal-offices)  
Visit ECT Online at [www.ect-cpg.com/vg-mass-interconnect-products](http://www.ect-cpg.com/vg-mass-interconnect-products)



A Coahu Company